

USB Telephonic Stethoscope

AMD-3725



Synchronized Quality Auscultation at a Low Bandwidth

At the core of many clinical telemedicine assessments are the heart and lung sounds. The *USB Telephonic Stethoscope* delivers high quality electronic auscultation to remote physicians using low data bandwidth.

This stethoscope, developed for telemedicine applications, creates an audio signal of the auscultation sounds and transmits it electronically in real-time – this allows the clinician (local user) and remote physician (remote user) to hear the patient's heart and lung sounds at the same time so they can work together to treat the patient.



Auscultation Unit Operates on Either Transmit or Receive Mode



Volume Control

Product Features:

- Low auscultation bandwidth (20 Hz – 1400 Hz) and low data communications bandwidth (19.2 Kb/s) deliver high performance.
- Bell/Diaphragm (B/D) switch offers optimal auscultation sounds for both cardiac and pulmonary examinations.
- Transmit/receive modes provide synchronized auscultation between the clinician (transmit mode) and the remote physician (receive mode).
- Volume control allows you to independently adjust sound level delivered to the headset that is plugged into that auscultation unit.
- PC to PC sound transmission via USB connection allows you to easily share auscultation sounds with remote provider.

Bell/Diaphragm Switch

- Bell position has bandwidth of 20 Hz to 250Hz with enhanced low frequencies for optimal emphasis of heart sounds.
- Diaphragm position extends the high frequencies to 1,400 Hz for emphasis of pulmonary sounds.





Technical Specifications:

Components/Parts:

- Stethoscope Auscultation Unit: 2.6" (w) x 4.3" (d) x 0.9" (h)
(6.6 cm x 10.9 cm x 2.3 cm)
- Chest piece
- Headset
- USB cable

Bell Position Bandwidth: 20 Hz – 250 Hz

Diaphragm High Frequencies: Up to 1400 Hz

Connection/Interface: USB interface cable to PC

Data Communications Channel:

- PC to PC:
 - ◆ Use USB port on a PC connected to the IP network.


Operating Conditions:

- Ambient temperature: 50° F to 104° F (10° C to 40° C)
- Relative humidity: 30% to 75%
- Atmospheric pressure: 700 hPa to 1,065 hPa

Storing & Transport Conditions:

- Ambient temperature: 32° F to 122° F (0° C to 50° C)

Remote Physicians Can Hear
Auscultation Sounds from
Around the Globe

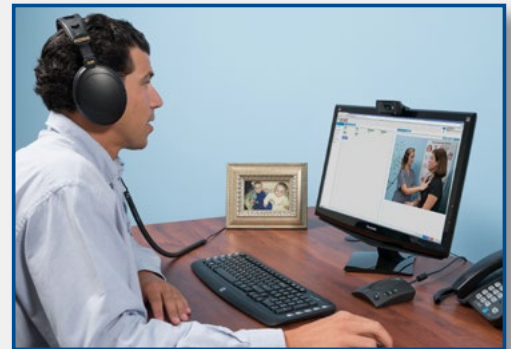

AMD Global Telemedicine
321 Billerica Road
Chelmsford, MA 01824

Toll-Free: 1-866-449-8210
info@amdtelemedicine.com
www.amdtelemedicine.com